



شرکت مهندسی صباتام صنعت

weflo

کاتالوگ

CATÁLOGO DE FABRICANTE

WEFLO VALVE COMPANY LTD.

WEFLO®

WEFLO VALVE CO., LTD

IPC BRASIL e WEFLO

QUALIDADE , INOVAÇÃO , EXPERIÊNCIA E EXCELÊNCIA

۲۲۸ ۵۵ ۸۱۸

WWW.SABATAM.COM



OS&Y Resilient Seated Gate Valve Flanged Ends, 200PSI/250PSI Size 14"–24" **FIG · F1111–200 / F1111–250**



ONLINE CERTIFICATIONS DIRECTORY

HMRZ, EX15265
Gate Valves

[Page Bottom](#)

Gate Valves

[See General Information for Gate Valves](#)

WEFLO VALVE CO LTD
Intersection of Huadong Rd and Chunyang Rd
Qingdao National High-tech Industrial Development Zone
QINGDAO, SHANDONG 266111 CHINA

EX15265

Pattern	Model	Size, in.	End Configuration	Rated Pressure, psig
NRS	F0211-300, F0222-300, F0212-300	2, 5	Flanged, Grooved, Flanged by Grooved	300
NRS	F0211-300, F0222-300, F0233-300, F0212-300, F0213-300	3	Flanged, Grooved, Flanged by Grooved, Mechanical Joint, Flanged by Mechanical Joint	300
NRS	F0211-300, F0222-300, F0233-300, F0213-300	4, 6, 8, 10, 12	Flanged, Grooved, Mechanical Joint, Flange/Mechanical Joint	300
NRS	F0211-300	5	Flanged	300
OS&Y	F0111-300, F0122-300, F0112-300	2-1/2, 3, 4, 5, 6, 8, 10, 12	Flanged, Grooved, Flanged by Grooved	300
NRS	F0222-300	4, 5, 6, 8, 10, 12	Grooved by Grooved	300
NRS	F1211-250, F0233-250, F0213-250	14, 16, 18	Flanged, Mechanical, Flanged by Mechanical	250
NRS	F1211-200, F0233-200, F0213-200	20, 24	Flanged, Mechanical, Flanged by Mechanical	200
OS&Y	F1111-250, F0133-250, F0113-250	14, 16, 18	Flanged, Mechanical, Flanged by Mechanical	250
OS&Y	F1111-200, F0133-200, F0113-200	20, 24	Flanged, Mechanical, Flanged by Mechanical	200
NRS	F1811-200	2-1/2, 3, 4, 6, 8, 10, 12	Flanged	200
NRS	F1811-250	2-1/2, 3, 4, 6, 8, 10, 12	Flanged	250
OS&Y	F1711-200	2-1/2, 3, 4, 6, 8, 10, 12	Flanged	200
OS&Y	F1711-250	2-1/2, 3, 4, 6, 8, 10, 12	Flanged	250
NRS	F0211D-300	4, 5, 6, 8, 10, 12	FL x FL	300
	F0212D-300		FL x GRV	
	F0222D-300		GRV x GRV	
NRS	F0213D-300	4, 6, 8, 10, 12	FL x MJ	300
	F0233D-300		MJ x MJ	
NRS	F0211D-250	4, 5, 6, 8, 10, 12	FL x FL	250
	F0212D-250		FL x GRV	
	F0222D-250		GRV x GRV	
NRS	F0213D-250	4, 6, 8, 10, 12	FL x MJ	250
	F0233D-250		MJ x MJ	
NRS	F0211D-200	4, 5, 6, 8, 10, 12	FL x FL	200
	F0212D-200		FL x GRV	
	F0222D-200		GRV x GRV	
NRS	F0213D-200	4, 6, 8, 10, 12	FL x MJ	200
	F0233D-200		MJ x MJ	

Trademark and/or Tradename: **WEFLO**, Weilong®

Last Updated on 2015-04-06

[Questions?](#)

[Print this page](#)

[Terms of Use](#)

[Page Top](#)

2016 UL LLC

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2016 UL LLC".



شرکت مهندسی صبا تام صنعت

OS&Y Resilient Seated Gate Valve Flanged Ends, 200PSI/250PSI Size 14"–24" FIG · F1111–200 / F1111–250

Specifications

- Complies with AWWA C515 Standard.
- Heavy duty handwheel and attachment nut.
- High quality graphite stem seal.
- NPT plug on body.
- Flanges to ANSI B16.1 Class125. (Other flange types available upon request)
- UL Listed.
- Certified to NSF/ANSI 61 & 372.

Working Pressure

- 250PSI for 14"–16"–18".
- 200PSI for 20"–24".

Working Temperature

- -10°C to 82°C.

Corrosion Protection

- Fusion Bonded Epoxy Coated Interior and Exterior to AWWA C550 Standard.


Notes:

Design and material are subject to change without notice.

Material Specifications

Part Name	Material	ASTM Spec.
Body	Ductile Iron	A536 65-45-12
Wedge	Ductile Iron, EPDM Encapsulated	
Wedge Nut	Brass	C67400
Stem	Stainless Steel	AISI 431
Bonnet	Ductile Iron	A536 65-45-12
Gasket	EPDM	Commercial
Packing	Graphite	Commercial
Gland	Ductile Iron	A536 65-45-12
Yoke Nut	Bronze	B62 C83600
Handwheel	Ductile Iron	A536 65-45-12
Handwheel Nut	Ductile Iron	A536 65-45-12
NPT Plug	Malleable Iron	Commercial
Gland Bolt	Stainless Steel	AISI 316
Bonnet Bolt	Carbon Steel	A307 B

Schematic

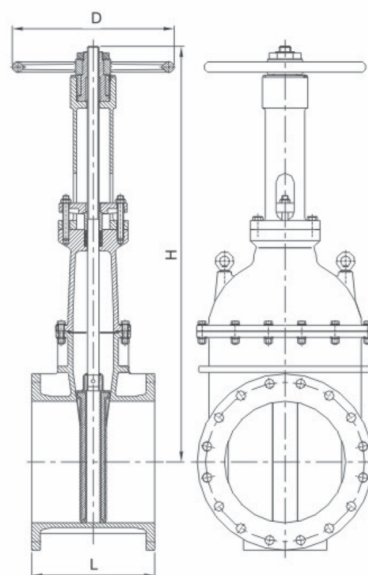

Dimensions (mm / inch)

Size	350 / 14"		400 / 16"		450 / 18"		500 / 20"		600 / 24"	
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
L	381	15	406	16	432	17	457	18	508	20
H (Open)	1574	61.97	1786	70.31	2020	79.53	2276	89.61	2600	102.36
H (Close)	1224	48.19	1386	54.57	1570	61.81	1776	69.92	2000	78.74
D	445	17.5	535	21	610	24	610	24	762	30